


Dimensions

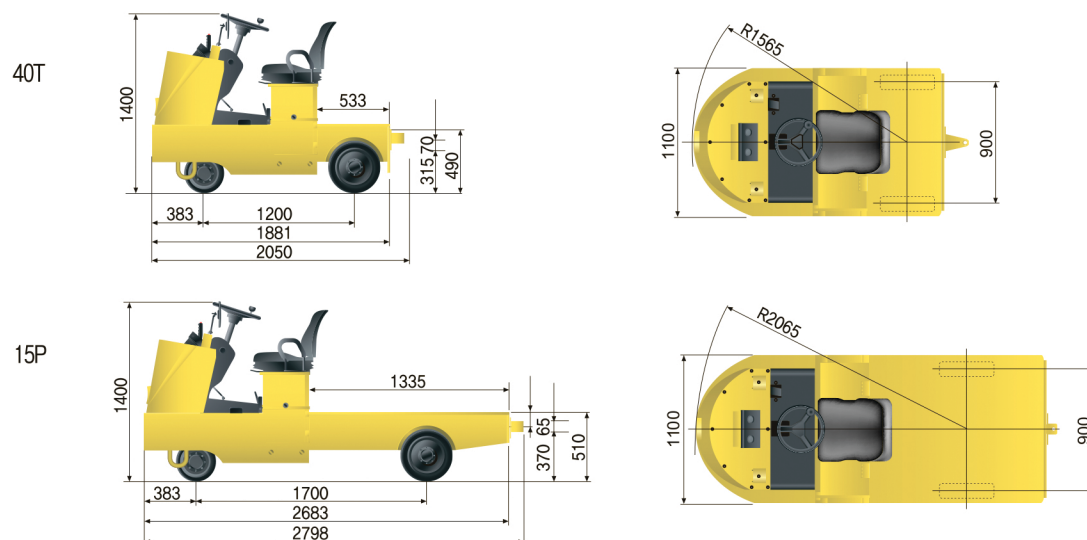

Specifications

Description			Unit	40T	15P
PERFORMANCE	Capacity		kg	4,000	1,500
	Travel Speed	Loaded	km/h	8	8
		Unloaded	km/h	10	10
	Outside Turning Radius		mm	1,565	2,065
DIMENSION	Overall Length		mm	2,050	2,798
	Overall Width		mm	1,100	1,100
	Overall Height		mm	1,400	1,400
	Wheel Base		mm	1,200	1,700
	Wheel Tread – Rear		mm	900	900
	Weight(Unloaded)		kg	1,250	1,200
POWER TRAIN	Drive Motor		kw	2.7	2.7
	Battery	Voltage	V	48	48
		Capacity	AH/5HR	280	280
Control Type			-	S.E.M	S.E.M
TIRE	Size, Front		-	Φ 305x127(1)	Φ 305x127(1)
	Size, Rear		-	4.00-8(2)	5.00-8-8PR(2)

* Materials and specifications are subject to change without notice. Metric is precise but U.S. standard may be rounded.

• Option: Beacon lamp, Front Urethane tire, Non-Marking Tire and Cargo-deck, Suspension seat, Head guard.

HYUNDAI
HEAVY INDUSTRIES CO., LTD.
CONSTRUCTION EQUIPMENT DIVISION

HEAD OFFICE 1 CHEONHA - DONG, DONG-KU, ULSAN, KOREA
(Sales Office) TEL : (82)52)230-7970-7729 FAX:(82)52)230-7979-7720
U.S. Operation Hyundai Construction Equipment U.S.A., Inc.
955 ESTES AVENUE, ELK GROVE VILLAGE IL, 60007
TEL : (1)847 - 437 - 3333 FAX : (1)847 - 437 - 3574
European Operation Hyundai Heavy Industries Europe N.V.
VOSSENDAAL 11, 2440 GEEL, BELGIUM
TEL : (32)14 - 562200 FAX : (32)14 - 593405 - 06

PLEASE CONTACT



Телефон в Челябинске
+7(351) 772-74-74

Телефон в Екатеринбурге
+7(343) 310-22-20

www.hyundai-ce.com

EN - 2006. 6 rev.0